



# EI60 SOLID



**U<sub>d</sub> VALUE**  
(W/m<sup>2</sup> \* K)



**MAXIMUM  
LOAD**



**SEALS**



**FIRE RESISTANT  
SEAL**



**PROTECTIVE  
FEET**



**HANDRAIL**



**YEARS  
GUARANTEE**



The mark of  
responsible forestry



COMPLIANCE WITH  
THE STANDARD

**GOLDWOOD**

CLASSIC

EI

MINI

FLEX

SOLID

LONG

# EI60 SOLID

# 66 mm

The SOLID EI60 loft ladders are characterized by triple sealing, including a single fire sealing and hatch thickness 66mm. The SOLID EI60 loft ladders have the EI60 fire resistance class. The EI60 model is ideally suited for installation in rooms particularly exposed to fire outbreak. Their fire safety properties allows an effective isolation of the room, in which the fire occurred, from the attic. This prevents further spread of fire. Thanks to the durable SOLID metal ladder, the maximum load when using stairs is up to 210 kg. The loft ladders have anti skidding feet, they adheres perfectly to the ground, prevent scratching of the floor and provide an aesthetic finish for the ladder after cutting. For increased safety and convenience of use, SOLID EI60 loft ladders are equipped in a stable and durable handrail. In the interest of user convenience, the handrail can be installed on the left or right side – depending on the customer preferences. The excellent quality of materials used for the production of loft ladders and attention to every detail of finish cause that the stairs will satisfy even the most demanding customers.

## Technical specification

Insulated hatch thickness	66 mm
Thickness of thermal insulation	60 mm
Hatch colour from both sides	White
Wooden ladder	3 sections
Height of wooden box	170 mm
Width of ladder	400 mm
Width of step	361 mm
Depth of step	113 mm
Landing space	145 cm
Opening distance/angle	168 cm
Maximum ceiling height	280 cm

### Box dimensions [cm] AxB

120x60 130x60

120x70 130x70

Outer box dimensions, mounting opening 2 cm larger

## Accessories



Masking batten




Mounting system



Hatch balustrade

## Technical draw

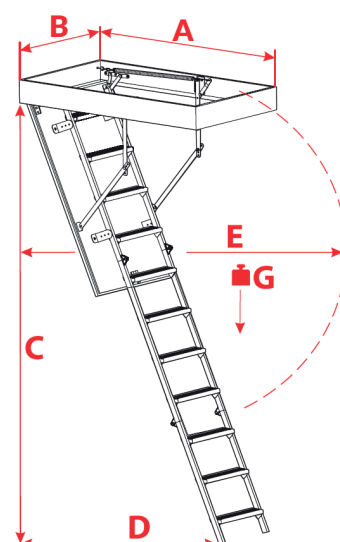

C	280 cm
D	145 cm
E	168 cm
G	210 kg